




# Seed Light System

## PARTS LIST

- 2 – Vertical Leg Bar
- 2 – Foot Bar
- 1 – Channel crossbar with cord & lock
- 1 – 2 ft. or 4 ft. EDLII LED Smart Timing Lamps
- 1 – Power cord with on/off switch

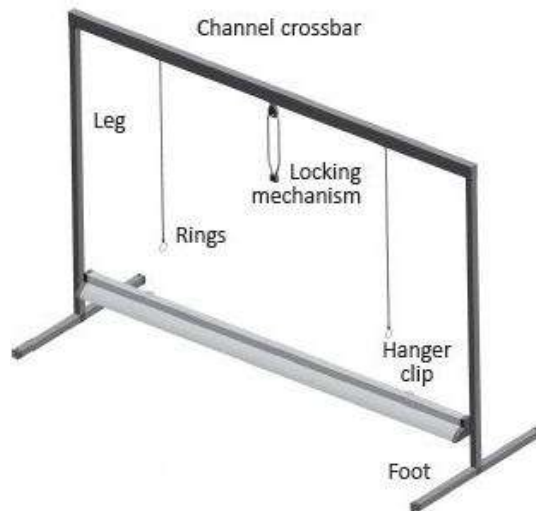

## INSTALLATION INSTRUCTIONS

1. Install the foot bars into the vertical leg bars. Make sure that the foot bars sit flush against the vertical leg bars. Secure the foot bars to the vertical leg bars with a Phillips head screwdriver and the screws provided and secure to hand tightness, do not over-tighten.
2. Set the top crossbar on a sturdy flat surface with the holes facing up. Slide the open ends of the leg bars into the holes of the crossbar. Make sure that the leg bars are seated firmly into the crossbar.
3. Stand the light stand up. We recommend positioning it over a chair or other elevated surface in preparation for hanging your light fixture.
4. Set the light fixture under the crossbar as shown in the drawing and pull down the hanger cables. Attach the hanger clips on the EDLII LED Smart Timing Lamps to the rings on the adjustable cables.
5. You may adjust the height of the light fixture by adjusting the length of cord at the center of the crossbar and setting the height by securing the locking mechanism against the crossbar.


## MOUNTING THE EDLII LED Smart Timing Lamps TO LIGHT STAND

1. Carefully remove components from box and protective foam and ensure that your EDLII LED Smart Timing Lamps box includes the following:
  - a. One EDLII LED lamp fixture.
  - b. Two hook style hanging clips.
  - c. One power cord.
2. Inspect the fixture, hanging clips, and power cord for any damages. If present, please contact your vendor for service and replacement.
3. Clip the mounting tabs onto the back of the fixture. The mounting position is indicated by black arrows.
4. Clip the hooks on the ends of the cord onto the mounting tab of the fixture.
5. Pull the rope at the top of the crossbar down to raise the height of the fixture.
6. Plug the grounded electrical cord (provided) into the wall socket.
7. Time setting: please refer to the attached picture, use the SET button to confirm the setting parameters through the indicator lamp.

Turn on 12 hours, another 12 OFF, repeat every 24hour cycle.

Turn on 16 hours, another 8 OFF, repeat every 24hour cycle.

Turn on 18 hours, another 6 OFF, repeat every 24hour cycle.

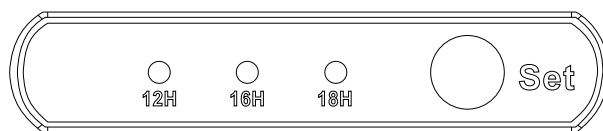

**PS:** The indicator light flashes 3 times, all setting successful. If you want to reset, please turn off by power cord wire switch at first, then turn on and reset.

## CAUTION !

- Do not use with dimmers, dimming switches or any power potentiometers.
- Do not daisy-chain.